


ELMARK[®]

The Brand of Electricity

LED WALL LIGHT

IP54

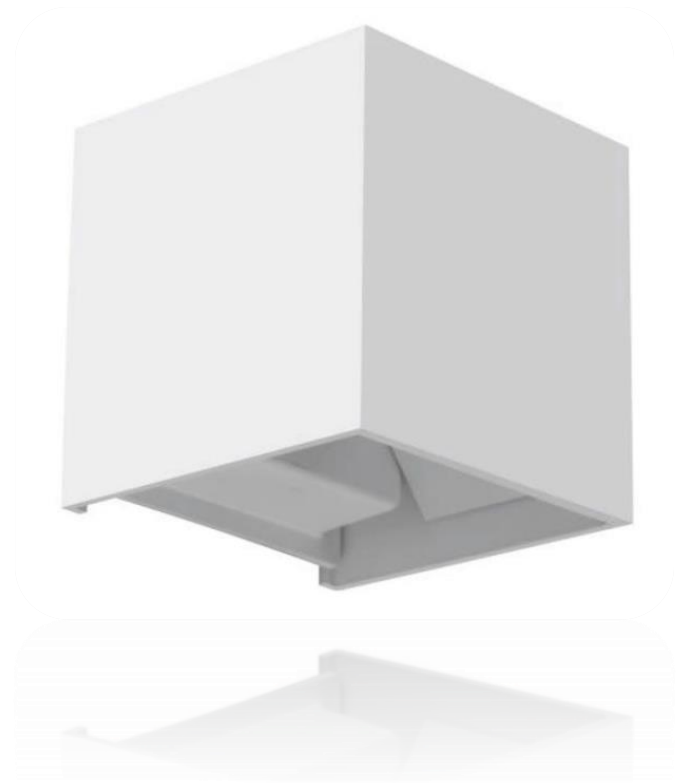

TECHNICAL SPECIFICATION

INDOOR- LED FIXTURES

ELMARK[®]

The Brand of Electricity

Technical data:

- Nominal voltage: 230V/ 50-60Hz
- Power: 2X5W
- LED driver: mounted in the body
- Light source: Epistar LED COB
- Colour temperature: 4000K
- Colour body: White; Black; Grey
- Body material: Aluminium
- Diffuser: Glass
- Colour rendering index: Ra≥80
- Long life: 30 000h
- Protection against dust and moisture: IP54

Features:

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Modern and elegant design
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Safety, low voltage operation
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Easy Installation

Area of application:

- Residential lighting
- Hotels
- Restaurants
- Shops
- Commercial buildings


TECHNICAL SPECIFICATION

INDOOR- LED FIXTURES



ELMARK[®]

The Brand of Electricity

Variants and Dimensions:



Type	Watt	Whole fixture lumens	Colour temp.	Colour body	Size (mm)			Catalogue number
					Length	Width	Height	
	(W)	(lm)	(K)					
Round	2X5W	400	4000	White	130	110	100	969LED100R/WH
Round	2X5W	400	4000	Black	130	110	100	969LED100R/BL
Round	2X5W	400	4000	Grey	130	110	100	969LED100R/GR



Type	Watt	Whole fixture lumens	Colour temp.	Colour body	Size (mm)			Catalogue number
					Length	Width	Height	
	(W)	(lm)	(K)					
Square	2X5W	400	4000	White	100	100	100	969LED100S/WH
Square	2X5W	400	4000	Black	100	100	100	969LED100S/BL
Square	2X5W	400	4000	Grey	100	100	100	969LED100S/GR

TECHNICAL SPECIFICATION


INDOOR- LED FIXTURES

ELMARK®

The Brand of Electricity

Barcodes:

3800131217134	969LED100R/WH
3800131217141	969LED100R/BL
3800131217158	969LED100R/GR
3800131217165	969LED100S/WH
3800131217172	969LED100S/BL
3800131217189	969LED100S/GR

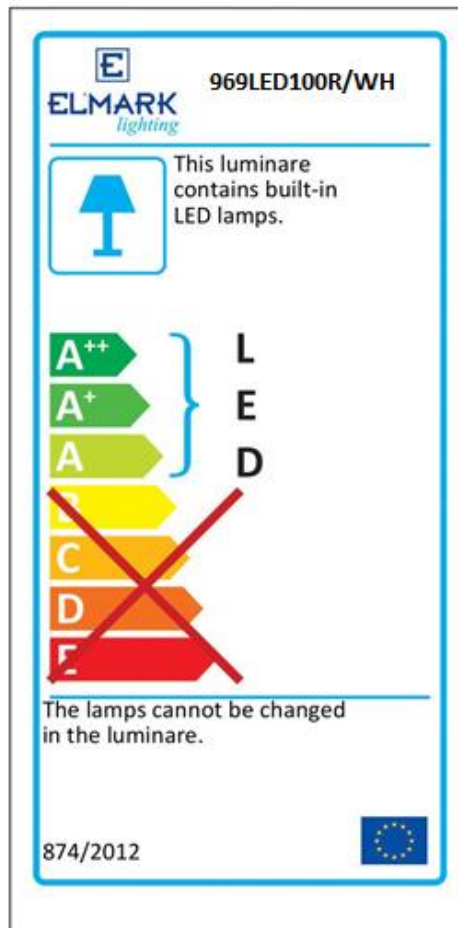

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 • EN 50581:2012

CE RoHS COMPLIANT

www.elmarkholding.eu